




Elevator

Secondary Packaging

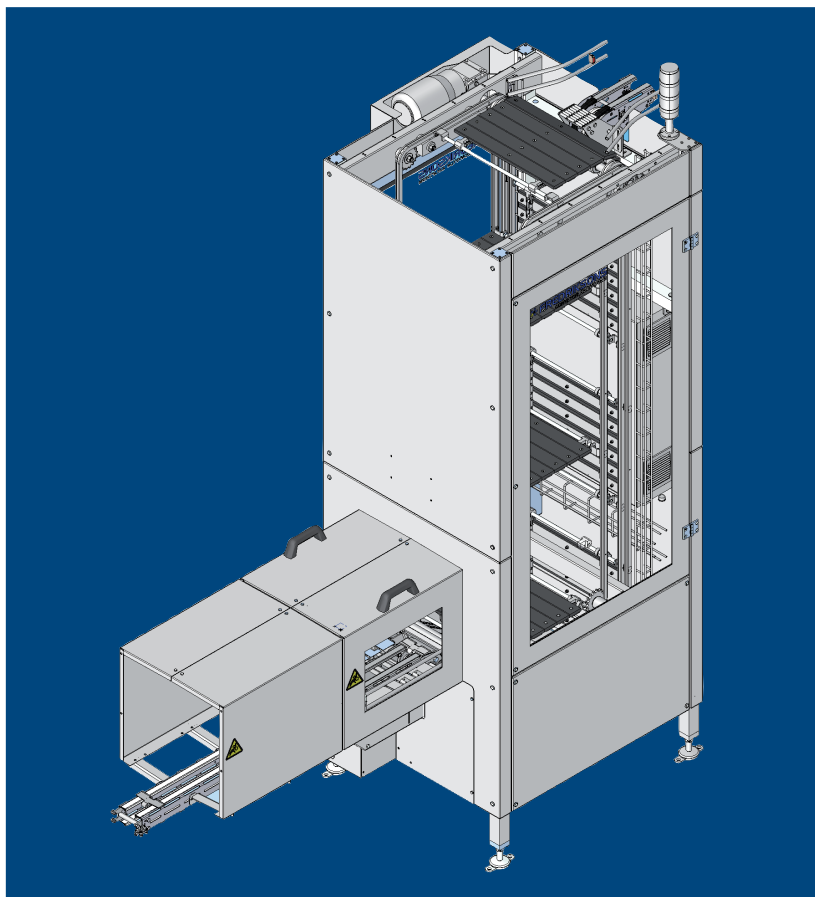



Elevator

Our Elevator is intended for transport of unit loads such as boxes and trays

This is a complete elevator with drive unit and supporting surface, for electrical connection to 3x230/400V.

The stand is made of aluminium and the casing and the motor shelf of grounded stainless steel. The motor is a Nord/Gear drive motor.

Capacity:
Product weight max 20 kg
Max. load total 200 kg

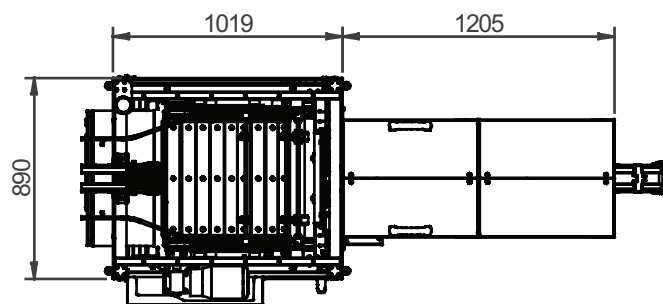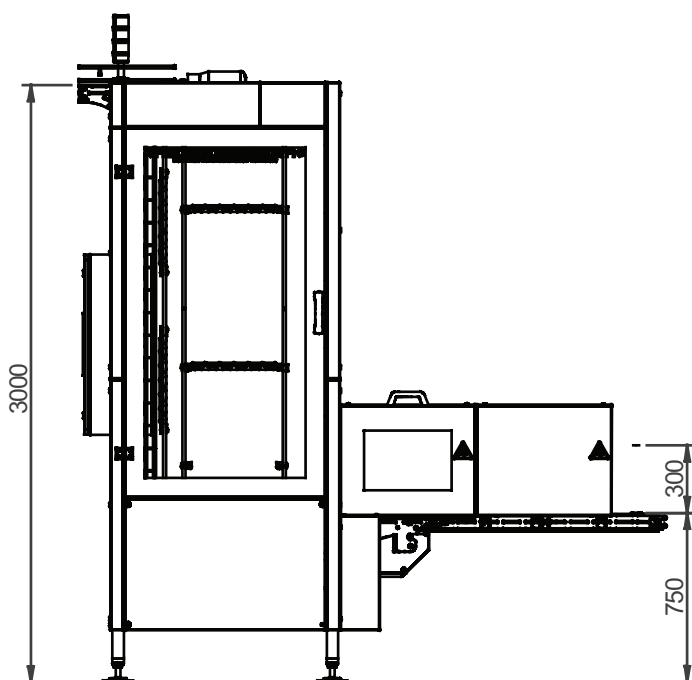

Type	Range of lift LH (mm)	Speed v m/min	Goods and di- mension max. LxBxH (mm)	Level in LB (mm)	Power kW	Products/min
F208378	600-6000	25 max	600x450x400	600-1200 mm	0,37-1,1	35 max